

RS 14 L

Sensor-switched indoor light

RS 14 L

EAN: 4007841 731113

E-No: 920622049

neva
lux



Taking it easy. High-frequency SensorLight RS 14 L, ideal for stairwells and corridors, for E 27 lamps, impact-resistant plastic shade, 360° detection, reach infinitely variable from 1 – 8 m, selectable time and twilight threshold.

- Long-life aluminium enclosure
- High-quality opal glass shade
- max. of 5 lights can be interconnected by cable
- Impact-resistant material rated to IK07
- Facility for connecting fan

RS 14 L

Sensor-switched indoor light

RS 14 L

EAN: 4007841 731113

E-No: 920622049



neva
lux

TECHNICAL DATA

Dimensions (Ø x H)	280 x 110 mm	Mechanical scalability	No
Mains power supply	230 – 240 V , 50 / 50 Hz	Photo-cell controller	Yes
Sensor Technology	High frequency	Twilight setting	2 – 2000 lx
Transmitter power	< 1 mW	Time setting	5 sec – 15 min
Output	60 W	Impact resistance	IK07
Switching output 1, resistive	800 W	IP rating	IP44
With lamp	No	Protection class	II
Lamp	All-purpose lamp	Ambient temperature	-20 – 40 °C
Base	E27	Housing material	Aluminium
With motion detector	Yes	Cover material	Plastic, opal
Detection	also through glass, wood and stud walls	Manufacturer's Warranty	5 years
Detection angle	360 °		
Angle of aperture	160 °		
Electronic scalability	Yes		

RS 14 L

Sensor-switched indoor light

RS 14 L


EAN: 4007841 731113

E-No: 920622049



neva
lux

ILLUSTRATIONS

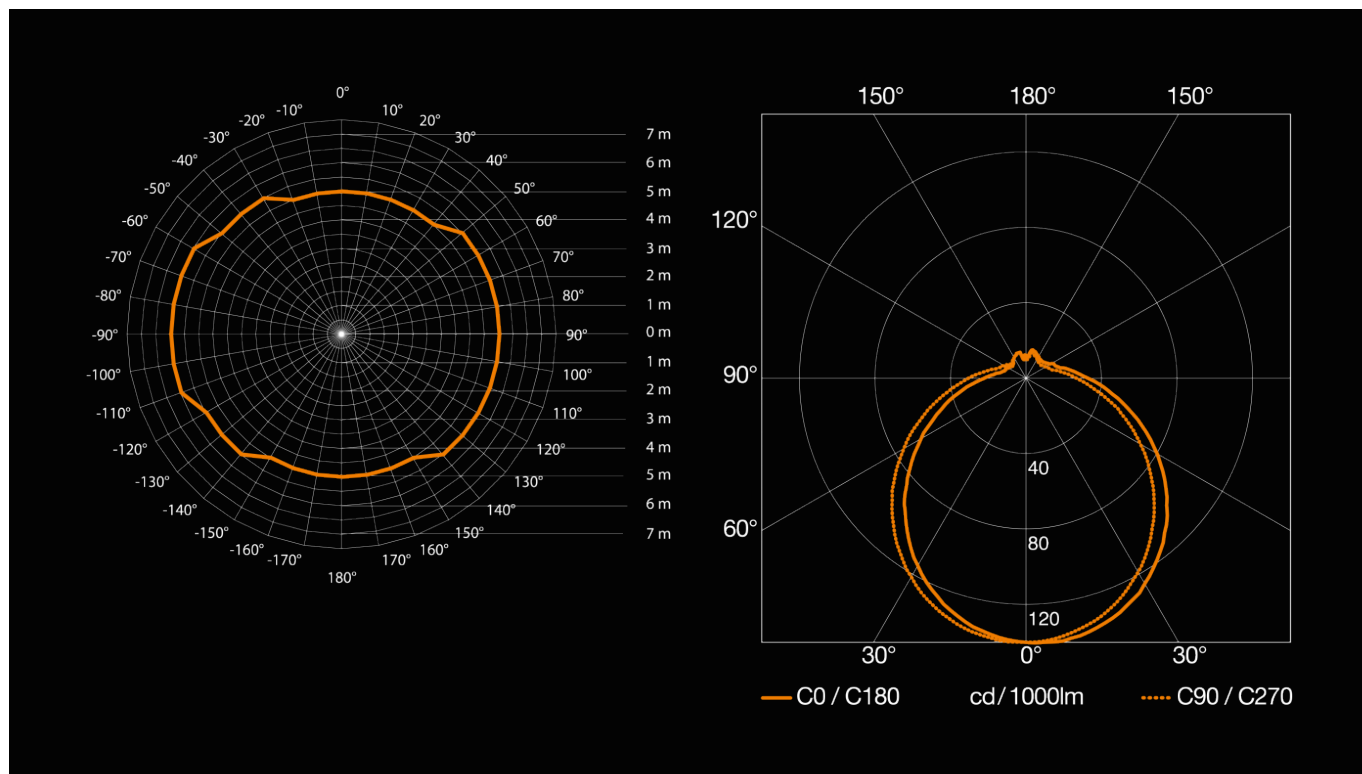

RS 14 L

Sensor-switched indoor light

RS 14 L

EAN: 4007841 731113

E-No: 920622049



neva
lux


HIGHLIGHTS



Long-life aluminium enclosure



High-quality opal glass shade

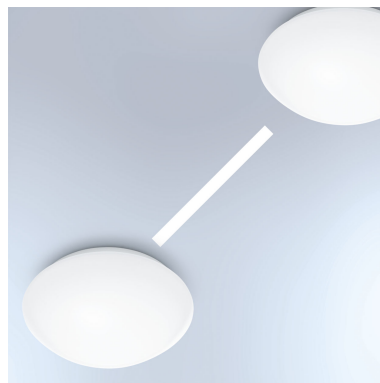

max. of 5 lights can be
interconnected by cable



Impact-resistant material rated to
IK07



Facility for connecting fan