







IR Quattro HD-2 24 m

The compelling sensor for building automation.

In keeping with the design of the Control PRO II family, the IR Quattro HD-2 24 m presence detector features outstanding technology. Ideal for use in offices, classrooms and wherever presence detection is required up to a height of 10 m. Configuration, commissioning and networking are performed conveniently and wirelessly via Bluetooth. Available in seven different interface versions.









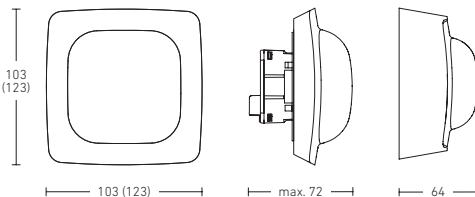




 professional line

 Bluetooth for fast, energy-saving connections	 Detects the smallest movements with 5200 switching zones	 Measures brightness for automatic lighting control	 Temperature measurement on the IP, KNX and DALI-2 IPD bus interfaces	 Humidity measurement on the IP, KNX and DALI-2 IPD bus interfaces
--	---	---	--	--

Infrared presence detector

IR Quattro HD-2 24 m



				
360° PIR with square detection	Detection zone 9 x 9 m presence	Max. 10 m mounting height	Configuration via the app	Electronic sensitivity adjustment of the four pyro sensors
				Order details (concealed wiring) COM1 4007841 064310 COM2 4007841 064334 DALI-2 APC 4007841 064358 DALI-2 IPD 4007841 064372 KNX 4007841 064846 IP 4007841 065959 BT IPD (Slave) 4007841 064396
UV-protected material				
Further presence detectors in the latest generation				
				Order details (surface mounting) COM1 4007841 064327 COM2 4007841 064341 DALI-2 APC 4007841 064365 DALI-2 IPD 4007841 064389 KNX 4007841 064853 IP 4007841 065942 BT IPD (Slave) 4007841 064402
True Presence®	True Presence® Multisensor			
				Order details (recessed mounting) COM1 4007841 079406 KNX 4007841 079413
HF 360-2	Hallway			