


High-frequency presence detector




# HF 360-2

## Our specialist for special situations.

The proven presence detector with a new design: now available with temperature and humidity measuring. Ideal for use in stairwells, WCs and side rooms. Bluetooth Mesh takes the effort out of setting them up, putting them into operation and interconnecting them.

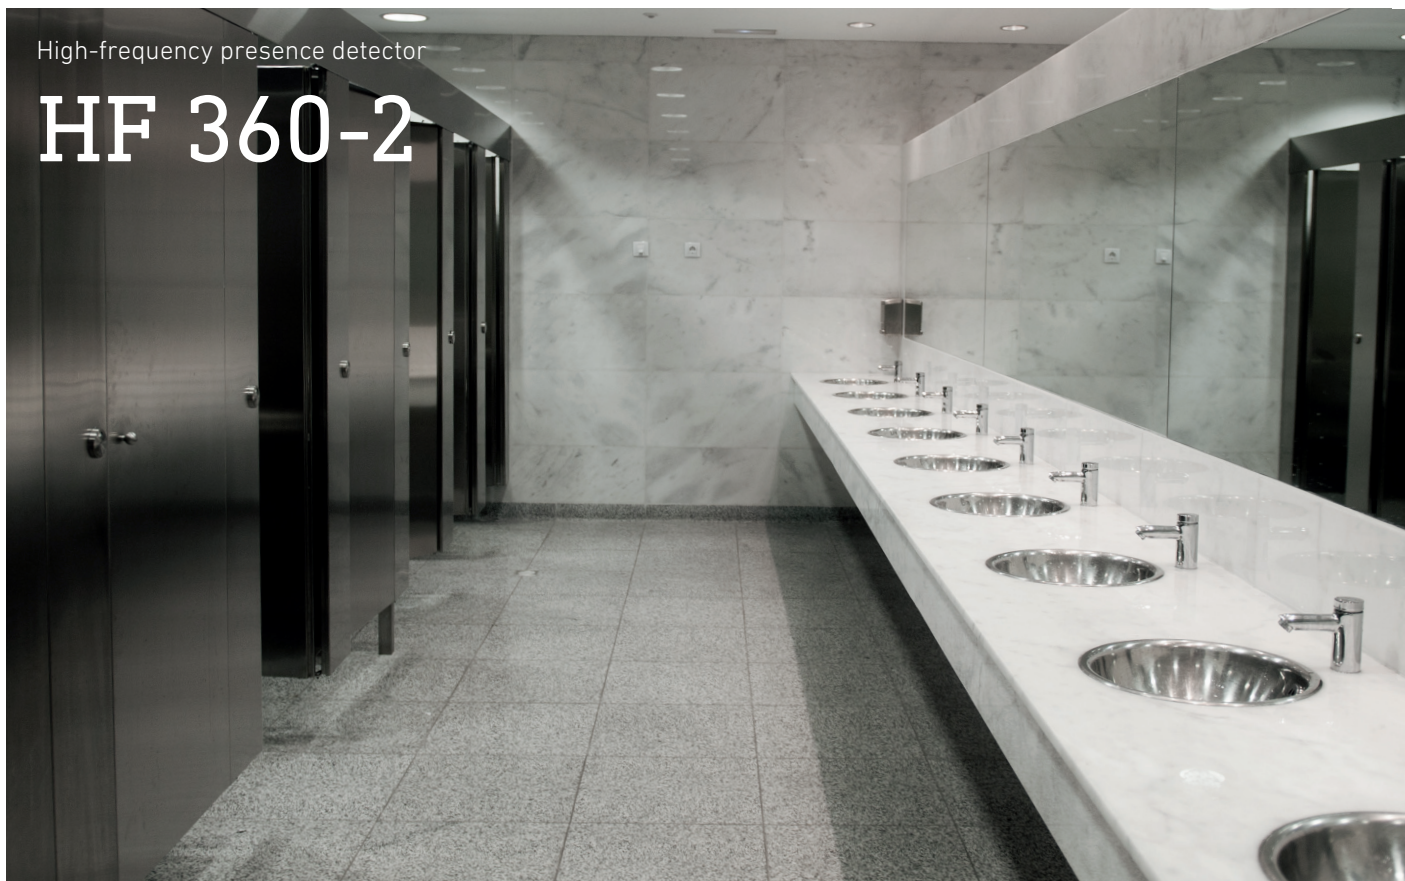







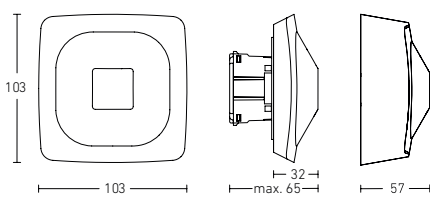




 professional line

 <b>Bluetooth<sup>®</sup> MESH</b>		
Bluetooth Mesh for fast and energy-saving connections	Temperature measuring with the bus interfaces KNX, IP and DALI-2 IPD	Humidity measuring with the bus interfaces KNX, IP and DALI-2 IPD

High-frequency presence detector

# HF 360-2



				7
360° high-frequency sensor	Reach Ø 12 m max. and through glass and lightweight construction stud walls	Mounting height 4 m max.	Electronic sensitivity setting	Interfaces
				<b>HF 360-2 technical specifications</b> Mounting height max. .... 2.50 – 4.00 m Reach radial and tangential ..... Ø 12 m
UV protected material				<b>Ordering details (concealed installation)</b> COM1 ..... 4007841 086558 COM2 ..... 4007841 086794 DALI-2 APC ..... 4007841 086596 DALI-2 IPD ..... 4007841 086619 KNX V3.5 ..... 4007841 086695 IP ..... 4007841 086671 BT IPD (Slave) ..... 4007841 086572
The latest presence detectors of the next generation				
				
True Presence®	True Presence® Multisensor			
				
Hallway	IR Quattro HD-2			
<b>Ordering details (surface installation)</b> COM1 ..... 4007841 086763 COM2 ..... 4007841 086787 DALI-2 APC ..... 4007841 086589 DALI-2 IPD ..... 4007841 086602 KNX V3.5 ..... 4007841 086718 IP ..... 4007841 086640 BT IPD (Slave) ..... 4007841 086565				